

RETAIL AIR SYSTEMS

P.O. Box 21532
 Chattanooga, TN 37424
 Phone: (800) 245-8104 Fax: (423) 553-1008

APPROVED BY: _____

DATE APPROVED: _____

CPSR-1 (Square to Round) Transition Cover

STANDARD FEATURES

1. 18 Gauge Galvanized Steel Construction.
2. Fully Welded Watertight One-Piece Construction.
3. Welds Coated after Fabrication.
4. 1" Thick, Neoprene Faced Fiberglass Insulation.
5. Cross Broken for Positive Water Run-Off.
6. Available on all Roof Curb Styles.

OPTIONS


- 1.
- 2.
- 3.
- 4.

PROJECT NAME: _____


CITY, STATE: _____

CUSTOMER: _____

JOB NUMBER: _____

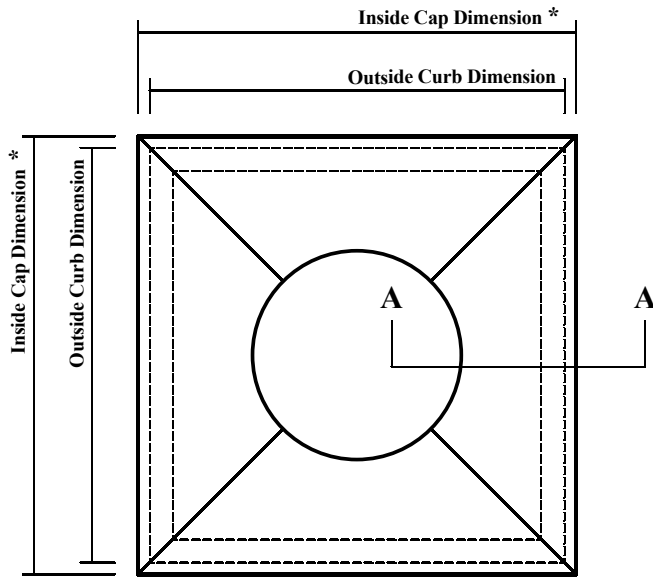


PLAN VIEW

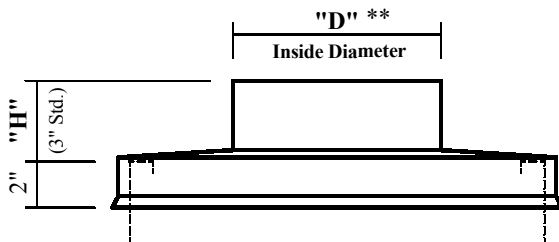

ELEVATION

Notes:

- * (1) Inside Cap Dimension = Curb O.D. plus 1-1/2" on all "Insulated" Conventional Roof Curbs (CPC-1, 2, 3) and, 1/2" on all Metal Building Roof Curbs, and "Non-Insulated" Conventional Roof Curbs (CPC-4, 5).
- ** (2) Inside Diameter = Pipe O.D. plus 1/2".
- (3) Available on all Roof Curb Styles.
- (4) See Conventional or Metal Bldg. Sections for Curb Selection.
- (5) Attach this sheet to Selected Roof Curb Drawing.

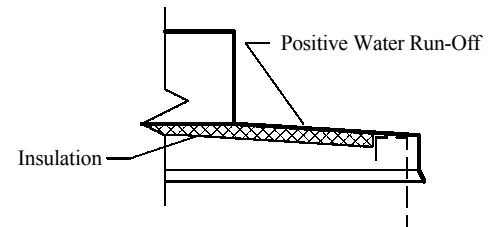

SECTION A-A

QUANTITY	INSIDE CAP DIM. *	OUTSIDE CURB DIM.	"D" (Inside Dia.) **	"H"	TAG
	X	X			
	X	X			
	X	X			
	X	X			
	X	X			